

Product Data Sheet



HX0Q2F

Replace "X" with 2, 3, 4, 5 or 6 for number of poles

Class H/K Fuse Panel 60 Amps, 250 Volts AC

Wire Range:

- #2/0 - #14 AWG Copper
- #2/0 - #14 AWG Aluminum

[See table below for wire sizes.](#)

Holds fuse size 13/16" diameter X 3"

Commonly used fuses in this holder: A2Y, CRN, NLN, NON, NRN, OT, OTN, RLN, RF

Electrical Ratings:

- 31 - 60A max (amperage rating based on maximum fuse rating for that physical size)
- 250 Volts AC
- Approved for 10,000 Amp Withstand Rating

Mechanical Ratings:


- Maximum insulator base temperature: 150 °C (302 °F) UL RTI
- Storage and transportation temperature range: -35 °C to 125 °C (-31 °F to 257 °F)
- Flammability rating of insulator base: UL 94 V-0

Materials:

- Fuse Clip: Copper alloy, tin plated
- Bus Bar: High conductivity aluminum, tin plated
- Insulator base: phenolic
- Terminal set screws: Aluminum, tin plated
- Connector mounting screws: Steel, zinc plated
- Bus Bar mounting screws: Steel, nickel plated

Agency Approvals:

- UL Recognized, UL 512 Terminal Block Standard, File No. IZLT2.E35113
- CSA Certified File No. LR21455

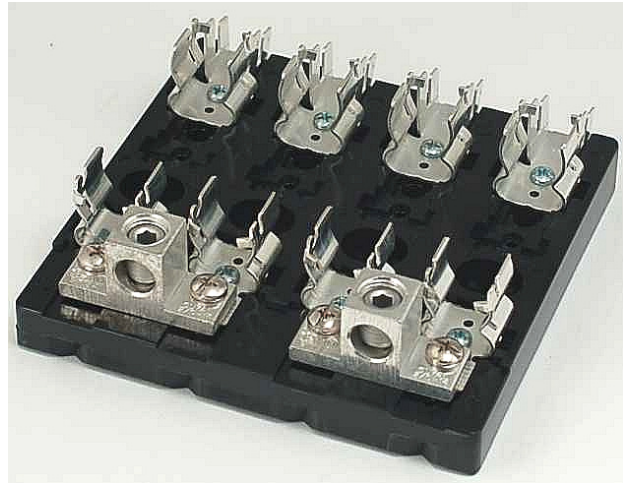

- CE compliant to IEC 60947-1
- RoHS Compliant

Wire Approvals:


Wire Size	Torque	Copper Wire Stranding Classes - Number of Strands		
		Solid	Class B	Class C
2/0 AWG	120 in. lbs		19	37
1/0	120 in. lbs		19	37
1	120 in. lbs		19	37
2	120 in. lbs		7	19
4	120 in. lbs		7	19
6	120 in. lbs		7	19
8	40 in. lbs		7	19
10	35 in. lbs	1	7	19
12	35 in. lbs	1	7	19
14	35 in. lbs	1	7	19

Aluminum Stranded Wire Range: #2/0 - #14 AWG

- Wire strip length – 1 1/16”
- Hex key needed: 3/16”
- Panel mountable: #10 fastener, torque to 25-30 in. lbs.

Accessories:

Printing available: Consult factory

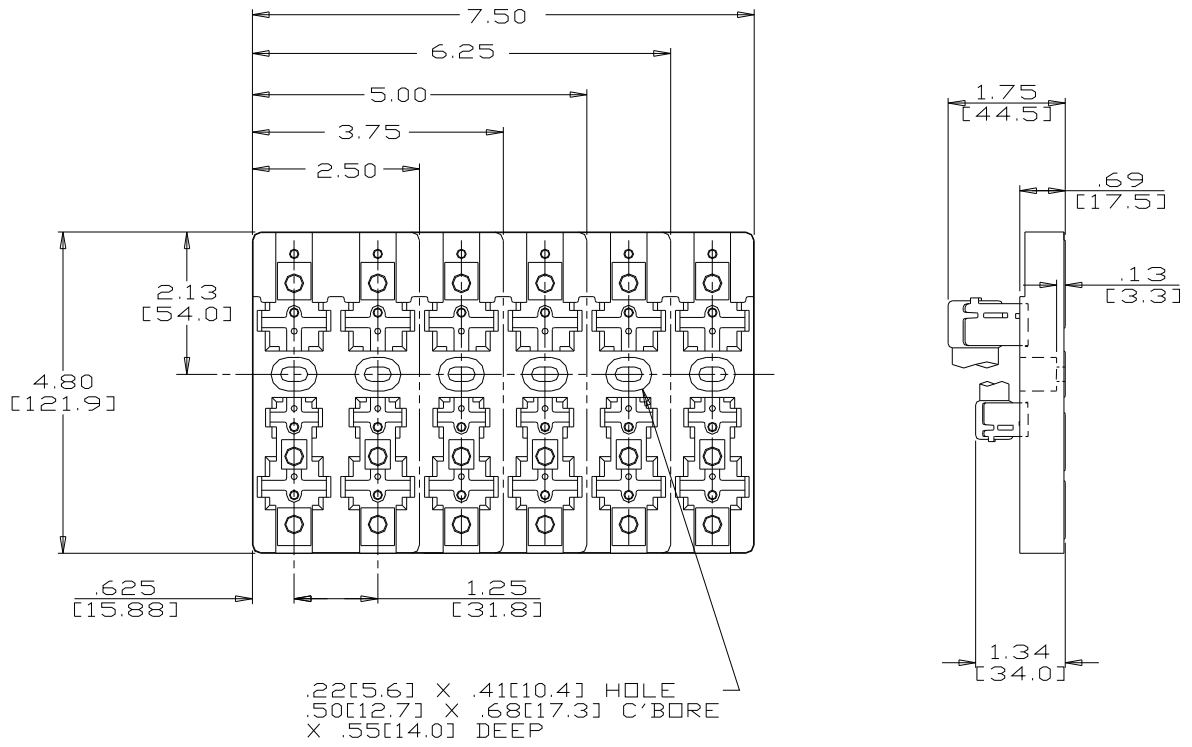

WWW.MARATHONSP.COM
1-419-352-8441

PDS 0184 REV A 10/24/07